



Auto Ref / Keratometer


CR-1/CRK-1/CR-1P/CRK-1P



Http://www.shhuvitz.com
Tel:+021-36307061
No. 150, Renjie Road, FengXian District, Shanghai


Smart Assembly Moving Control Technology

The invisible technology behind REF optical system can be seen in the accuracy and stability of the measurement results. Considering the refractive error of the patient, the measurement ring is projected on the retina, and is adjusted automatically by Smart Assembly moving to secure a stable signal. CRK improves the effect of uneven light reflection in normal and cataract eyes with the results being more accurate refractive power REF data.

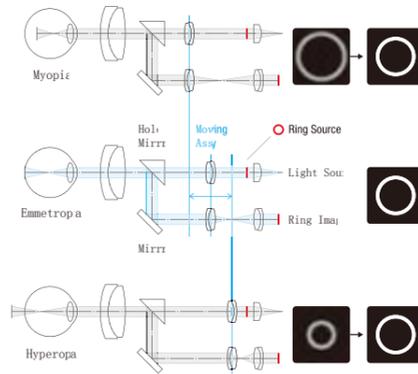

Smart Assembly Moving Control (SAMC) Tech

System Networking

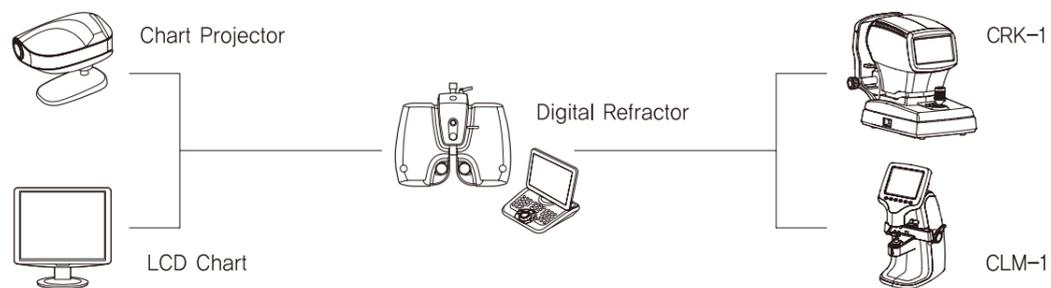

Specification

| | | | CR-1 | CRK-1 | CR-1P | CRK-1P |
|------------------------|------------------------|--|------|-------|-------|--------|
| Measurement Mode | K/R Mode | Continuous Keratometry & Refractometry | × | ○ | × | ○ |
| | REF Mode | Refractometry | ○ | ○ | ○ | ○ |
| | KER Mode | Keratometry | × | ○ | × | ○ |
| | Retro-ILL | Retro-illumination | × | × | ○ | ○ |
| | Color View Mode | Color View & Contact Lens Fitting Assistance (White & Blue LED Light) | × | × | ○ | ○ |
| Refractometry | Vertex Distance (VD) | 0.0, 12.0, 13.75, 15.0 | | | | |
| | Sphere (SPH) | -30.00~+25.00D (VD=12mm) (Increments : 0.01, 0.12, 0.25D) | | | | |
| | Cylinder (CYL) | 0.00~±12.00D (Increments : 0.01, 0.12, 0.25D) | | | | |
| | Axis (AX) | 0~180° (1° unit) | ○ | ○ | ○ | ○ |
| | Astigmatism Indication | -, +, ± (Mixed) | | | | |
| | Pupil Distance (PD) | 10~85mm | | | | |
| | Minimum Pupil Diameter | Ø2.0mm | | | | |
| | Radius of Curvature | 5.0~13.0mm (Increments : 0.01mm) | | | | |
| Keratometry | Cornea Power | 25.96D~67.50D (Increments : 0.05, 0.12, 0.25D) (When cornea equivalent refractive index is 1.3375) | | | | |
| | Cornea Astigmatism | 0.00~15.00D (Increments : 0.05, 0.12, 0.25D) | × | ○ | × | ○ |
| | Axis | 0~180° (Increments : 1°) | | | | |
| | Pupil, Iris Diameter | 2.0~14.0mm (Increments : 0.1mm) | | | | |
| | Memory of Data | 10 measurements for each eye | | | | |
| Auto Tracking Distance | Up and down | ±15mm | × | × | ○ | ○ |
| Others | Display | 7 inch Wide Color TFT LCD Resistive Touch Panel | | | | |
| | Interface | RS-232C | | | | |
| | Internal Printer | Thermal Line Printer | | | | |
| | Power Supply | 100-240VAC, 1.0-0.6A, 50/60Hz | | | | |
| | Dimensions / Weight | 261(W) X 513(D) X 433(H)mm/16kg | | | | |

Designs and details can be changed without prior notice for the purposes of improvement.