

PACHYMETER SP-100

PORTABLE PACHYMETER

DELIGHT IN SIGHT

Portable. Precise. Powerful.



- Automatic CCT corrected IOP calculations
- Wide measuring range 150 to 1,200 μm
- Patient data input & export capability
- Built-in printer
- 8 readings with averaging
- Cordless

 **TOMEY**
TECHNOLOGY AND VISION

THE TOMHEY PORTABLE PACHYMETER SP-100



QUALITY IN DETAIL

Small Size – High Ability


The Tomey pachymeter **SP-100** covers all your needs regarding pachymetry. Small and portable design, wireless operation and light weight make the **SP-100** an “easy-to-use unit”.

Customised Pachymeter


You need adjustable IOP correction? Easily done! With the programmable IOP formula you are able to get the central corneal thickness (CCT) corrected IOP. The **SP-100** calculates this automatically with the formula of your choice. The system displays the average of 8 measurements. Every single measurement is already an average out of up to 20 exams.

Documentation


You can print your results on the built-in printer or transmit it to a PC or network system via serial port. The printout includes the patient ID, name and measured data. The rechargeable battery with AC/DC adapter has a standby time up to 6 hours.




Average will be calculated out of 8 single measurements



IOP calculation



Settings display

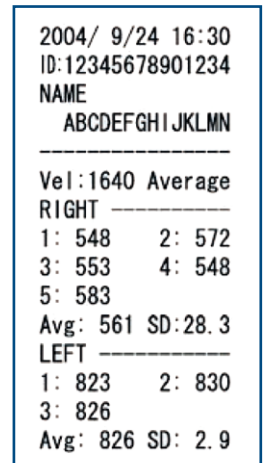

Sample printout



Control panel



Pachymeter probe



Illuminated LC display

SPECIFICATIONS

PACHYMETRY FUNCTION

Single Mode	8 single, average / minimum / latest options
Frequency	20 MHz
Velocity range	1,400 to 2,000 m/s
Default setting	1,640 m/s
Measurement range	1,400 to 2,000 m/s
Measurement accuracy	± 0.005 mm

MAIN UNIT

Display	STN 2.7" dot Matrix LCD 240 x 160 pixel
Printer	Built-in thermal printer
Communication port	RS-232

DIMENSIONS & ELECTRIC REQUIREMENTS

Dimensions WDH	118 x 207 x 59 mm
Weight	approx. 0.53 kg
Battery	Model Sonyo GS
Working time	6 hours 45 minutes
Battery charger	
Output	7.0 V
Load current	2 A

